


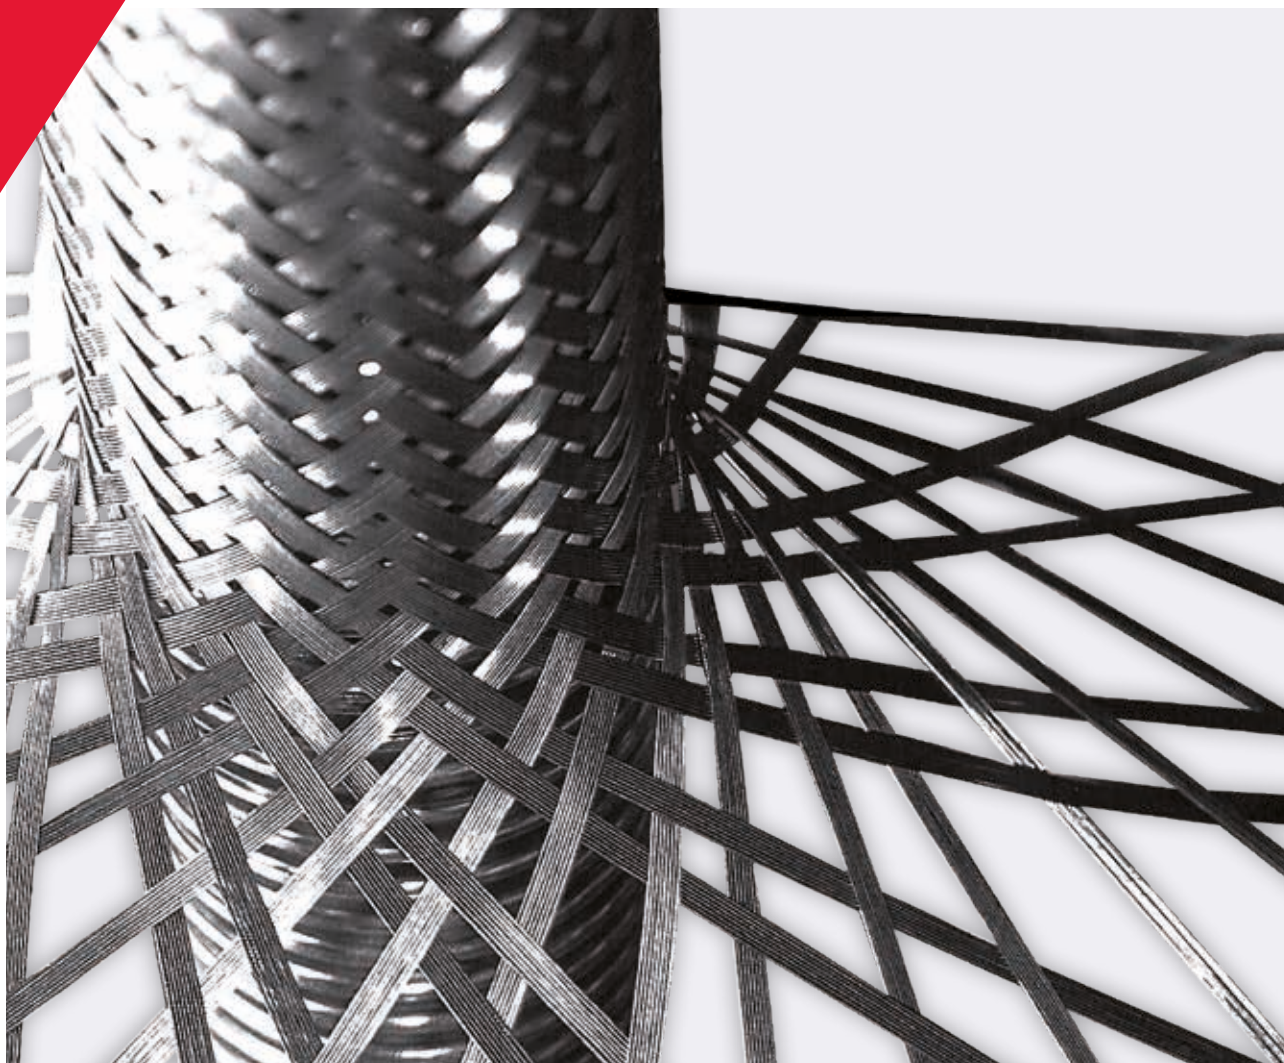

// HOSE

 TUYAUX

 SCHLAUCH

 TUBO

 MANGUERA

 SLANG

 SLANGE

 SLANGE

 LETKU

// HOSE

// 99DMM

STAINLESS STEEL HOSE - PARALLEL CORRUGATION - AISI 316L WITH 1 BRAID AISI 304

-  Flexible en acier inoxydable - onde parallèle - AISI 316L avec 1 tresse AISI 304
-  Edelstahl-ringwellschlauch - normale wellung - 1.4404 (AISI 316L) mit umflechtung aus 1.4301 (AISI304)
-  Tubo acciaio inox - ondulazione parallela - AISI 316L con 1 treccia AISI 304
-  Tubo de acero inox - corrugacion paralela - AISI 316L con una trenza AISI 304
-  Rostfri stålslang, parallellveckad. AISI316L (SS2353) med rostfri fläta AISI 304 (SS2333)
-  Rustfri stålslange - parallellkorrugerte - AISI 316L med 1 kryssfletting i AISI 304
-  Rustfri stålslange - parallel korrugeret - AISI 316L med 1 stålflet i AISI 304
-  Ruostumaton kokometalliletku-tiheä poimuinen rakenne päällys AISI 316L punos AISI 304



Hose: AISI 316L-DIN 1.4404-Z2CN17-12

Braid: AISI 304-DIN 1.4301-Z6CN18-09

Safety factor: 4:1

Temperature: -270 °C +700 °C

Tolerances: $\pm 0,2$ mm: DN 6 ÷ DN 32 $\pm 0,3$ mm: DN 40 ÷ DN 200

Item Code	Part Number									
		DN	mm	inch	without braid	with 1 braid		dynamic	static	
2600361	99DMM006110000	6	6,2	1/4	9,6	10,7	120	85	25	0,149
2600335	99DMM008130000	8	8,2	5/16	12,1	13,5	100	125	32	0,166
2600401	99DMM010180000	10	10,3	3/8	14,3	15,5	90	140	38	0,214
2600402	99DMM013210000	12	12,2	1/2	16,7	18,0	80	140	45	0,240
2600362	99DMM016230000	16	16,2	5/8	21,6	23,0	70	160	58	0,400
2600403	99DMM020300000	20	20,2	3/4	26,8	28,3	64	170	70	0,494
2600404	99DMM025380000	25	25,4	1	32,2	33,5	50	190	85	0,628
2600363	99DMM032430000	32	34,3	1 1/4	41,1	42,8	40	260	105	0,847
2600405	99DMM038540000	40	40,1	1 1/2	49,5	51,5	35	300	130	1,172
2600406	99DMM051680000	50	50,3	2	60,3	62,5	30	320	160	1,606
2600407	99DMM063880000	65	65,6	2 1/2	81,0	83,0	24	410	180	1,984
2600408	99DMM075000000	80	80,3	3	95,0	97,0	18	450	200	2,154
2600409	99DMM100000000	100	100,8	4	117,0	119,0	16	560	290	3,001
2600364	99DMM125530000	125	125,4	5	150,0	152,5	14	710	325	4,887
2600365	99DMM150780000	150	150,8	6	175,0	177,5	10	815	380	5,705
2600336	99DMM200280000	200	197,0	8	225,0	228,0	8	1015	500	9,150

All these data are based for a temperature of 20°C.

Dimensions shown may be changed without prior notice

// 99EMM

STAINLESS STEEL HOSE - PARALLEL NARROW CORRUGATION - AISI 316L WITH 1 BRAID AISI 304

- 🇫🇷 Flexible en acier inoxydable - onde parallèle rapprochée - AISI 316L avec 1 tresse AISI 304
 🇩🇪 Edelstahl-ringwellschlauch - enge wellung - 1.4404 (AISI 316L) mit umflechtung aus 1.4301 (AISI304)
 🇮🇹 Tubo acciaio inox - ondulazione parallela ravvicinata - AISI 316L con 1 treccia AISI 304
 🇪🇸 Tubo de acero inox - corrugacion paralela comprimida - AISI 316L con una trenza aisi 304
 🇸🇪 Rostfri stålslang. Parallell tätveckad. AISI316L (SS2353) med rostfri fläta AISI 304 (SS2333)
 🇳🇴 Syrefast stålslange - parallell- og tettkorrugert - AISI 316L med 1 kryssfletting i AISI 304
 🇩🇰 Rustfri stålslange - parallel tæt korrugeret - AISI 316L med 1 stålflet i AISI 304
 🇫🇮 Ruostumaton kokometalliletku- tihea pöimäinen päällys AISI 316L punos AISI 304


**Hose:** AISI 316L-DIN 1.4404-Z2CN17-12 (DN 10 ÷ DN 20)

AISI 316TI-1.4571 (DN 25 ÷ DN 150)

Braid: AISI 304-DIN 1.4301-Z6CN18-09**Safety factor:** 3:1**Temperature:** -270 °C +600 °C

Item Code	Part Number										
		DN	mm	toll±mm	inch	mm	toll±mm		dynamic	static	
2600015	99EMM010180000	10	10,2	0,2	3/8	18	0,4	165	100	29	0,30
2600142	99EMM013210000	12	12,9	0,2	1/2	21,3	0,4	110	120	34	0,38
2600017	99EMM020300000	20	19,8	0,2	3/4	29,1	0,4	80	160	53	0,52
2600088	99EMM025380000	25	25,1	0,5	1	35,3	0,7	50	155	64	0,73
2600018	99EMM032460000	32	31,7	0,5	1 1/4	44,9	0,7	40	180	79	1,15
2600064	99EMM038550000	40	40,7	0,5	1 1/2	54,9	0,7	45	200	98	1,55
2600034	99EMM051680000	50	49,9	0,5	2	65,7	0,7	38	280	120	1,63
2600019	99EMM063890000	65	65	0,6	2 1/2	82,9	0,8	26	275	150	2,35
2600020	99EMM076000000	80	80	0,7	3	100,8	0,9	29	360	180	3,91
2600143	99EMM102280000	100	100,1	0,7	4	122,8	0,9	20	450	218	4,46
2600086	99EMM127550000	125	124,9	0,8	5	150,6	1,0	20	720	315	7,09
2600144	99EMM152800000	150	150,4	0,9	6	178,2	1,1	23	900	360	9,69

All these data are based for a temperature of 20°C.

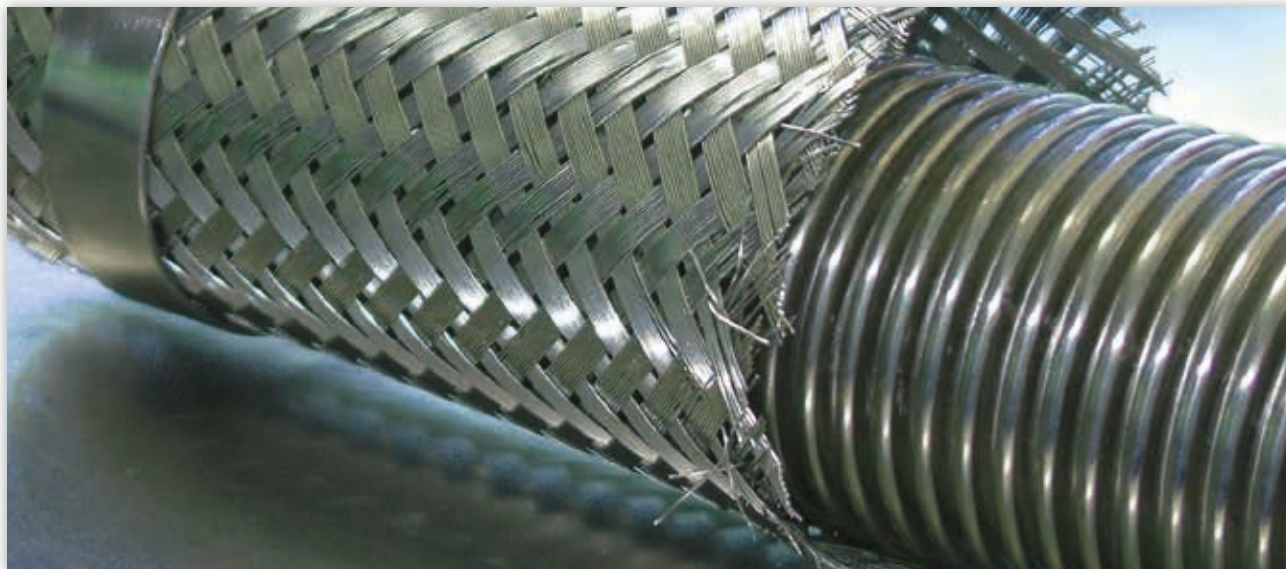



// WELDING RING

 BAGUE DE SOUDURE

 SCHWEISSRING

 ANELLO A SILDARE

 CASQUILLO SOLDABLE

 SVETSRING

 SVEISERING

 SVEJSERING

 HOLKKI

Dimensions shown may be changed without prior notice


// WELDING RING

// WELDING RING - STAINLESS STEEL AISI 304

-  Bague de soudure - Acier inoxydable 304
-  Schweissring - Edelstahl 1.4301 (AISI304)
-  Anello a saldare - Inox 304
-  Casquillo soldable - Inox 304
-  Svets ring - Syrafast stål 304
-  Sveisering - Syrefast stål 304
-  Svejsering - Rustfrit stål 304
-  Holkki - AISI 304



Item Code	Part Number	DN	DN inch
2301047	I2099A-006	6	1/4
2300859	I2099A-010	10	3/8
2300860	I2099A-013	12	1/2
2300861	I2099A-016	16	5/8
2300862	I2099A-019	20	3/4
2300863	I2099A-025	25	1
2300864	I2099A-032	32	1 1/4
2300865	I2099A-038	40	1 1/2
2300866	I2099A-050	50	2
2300867	I2099A-063	65	2 1/2
2300868	I2099A-076	80	3
2301926	I2099E-100	100	4
2301928	I2099E-125	125	5
2301930	I2099E-150	150	6
2304558	I2099A-200	200	8

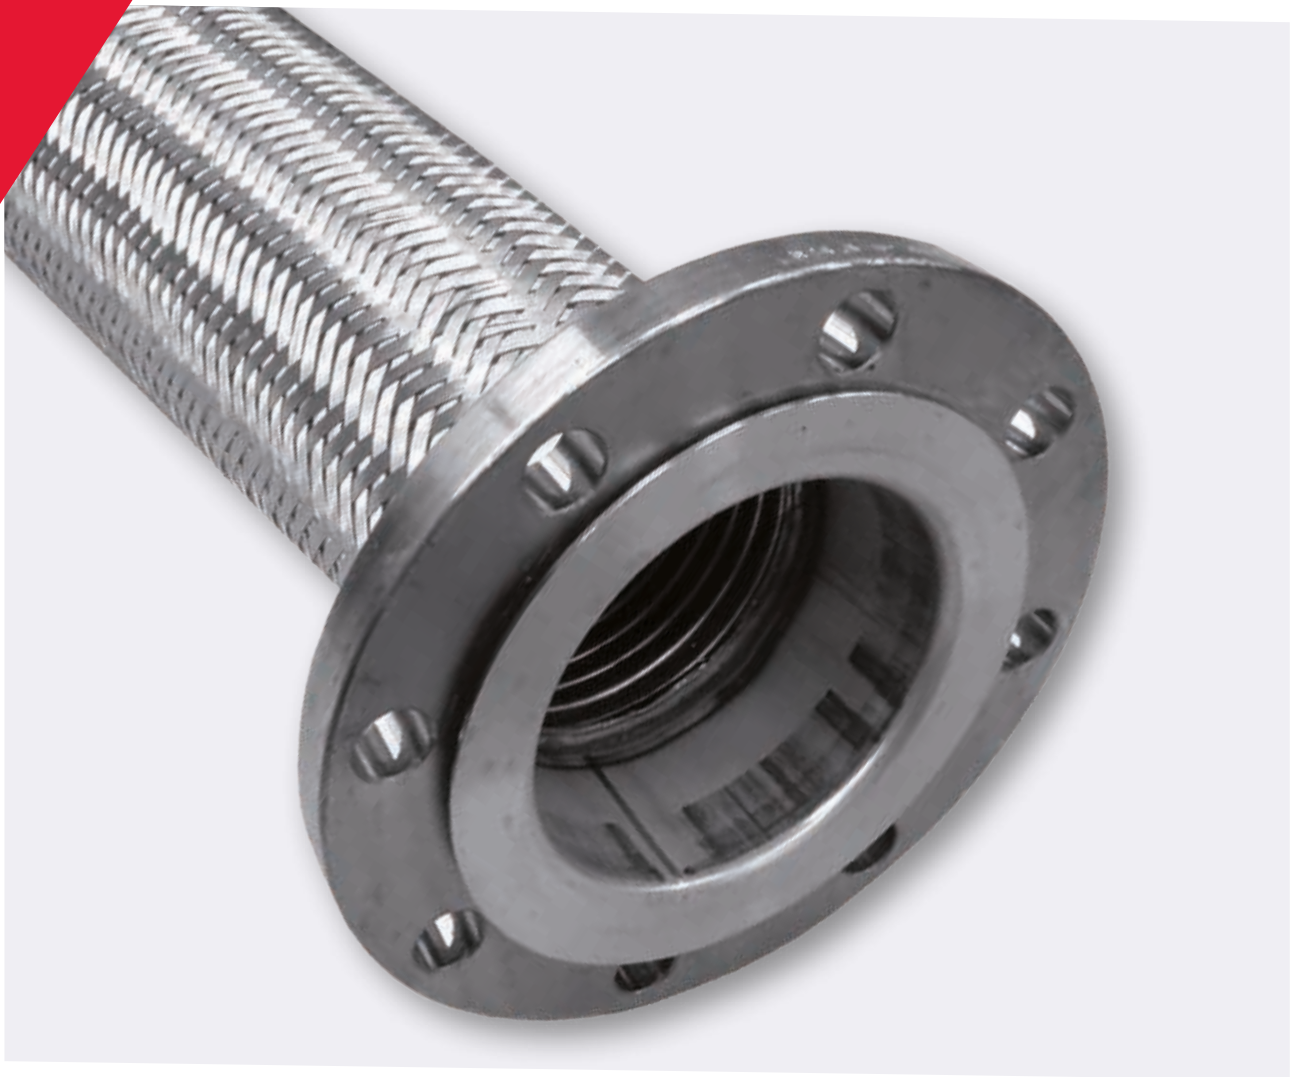

// FLANGES

 BRIDES

 FLANSCHEN

 FLANGE

 BRIDAS

 FLÄNSAR

 FLENSER

 FLANGER

 LAIPAT

// FIXED FLANGE

// FIXED FLANGE EN 1092-1 TYPE 11B WELDING NECK-RAISED FACE PN 10/16 - STEEL

-  Bride fixe type 11B à collerette à souder PN 10/16 - acier
-  Vorschweissfestflansch Typ 11B PN 10/16 - stahl
-  Flangia fissa tipo 11B con collare a saldare di testa - con gradino PN 10/16 - acciaio
-  Brida fija tipo 11B cuello para soldar PN 10/16 - acero
-  Fast fläns typ 11B PN 10/16 - stål
-  Fast flens type 11B PN 10/16 - karbonstål
-  Fast flange type 11B PN 10/16 - stål
-  Kiintolaippa hitsattavalla kauluksella tyyppi 11B. Laippa PN 10/16- teräs



Item Code	Part Number	DN	DN inch	H mm	E mm	D mm	Ø tube mm	b mm	n° hole	O mm	c mm	Weight kg
2301236	I0WBD6B0-020	20	3/4	40	58	105	26,9	18	4	14	75	1,00
2301237	I0WBD6B0-025	25	1	40	68	115	33,7	18	4	14	85	1,20
2301238	I0WBD6B0-032	32	1 1/4	42	78	140	42,4	18	4	18	100	1,75
2301239	I0WBD6B0-040	40	1 1/2	45	88	150	48,3	18	4	18	110	1,85
2301240	I0WBD6B0-050	50	2	45	102	165	60,3	18	4	18	125	2,55
2301241	I0WBD6B0-065	65	2 1/2	45	122	185	76,1	18	4	18	145	3,10
2301242	I0WBD6B0-080	80	3	50	138	200	88,9	20	8	18	160	4,00
2301243	I0WBD6B0-100	100	4	52	158	220	114,3	20	8	18	180	4,55
2301244	I0WBD6B0-125	125	5	55	188	250	139,7	22	8	18	210	6,20
2301245	I0WBD6B0-150	150	6	55	212	285	168,3	22	8	22	240	7,80

// FIXED FLANGE EN 1092-1 TYPE 11B WELDING NECK-RAISED FACE PN 10/16 STAINLESS STEEL 316L

-  Bride fixe type 11B à collerette à souder PN 10/16 - acier
-  Vorschweissfestflansch Typ 11B PN 10/16 - stahl
-  Flangia fissa tipo 11B con collare a saldare di testa - con gradino PN 10/16 - acciaio
-  Brida fija tipo 11B cuello para soldar PN 10/16 - acero
-  Fast fläns typ 11B PN 10/16 - stål
-  Fast flens type 11B PN 10/16 - karbonstål
-  Fast flange type 11B PN 10/16 - stål
-  Kiintolaippa hitsattavalla kauluksella tyyppi 11bB. Laippa PN 10/16- teräs




Item Code	Part Number	DN	DN inch	H mm	E mm	D mm	Ø Tube mm	b mm	n° hole	O mm	c mm	Weight kg
2301667	I3WBD6B0-015	15	1/2	38	45	95	21,3	16	4	14	65	0,70
2301525	I3WBD6B0-020	20	3/4	40	58	105	26,9	18	4	14	75	1,00
2301310	I3WBD6B0-025	25	1	40	68	115	33,7	18	4	14	85	1,20
2301311	I3WBD6B0-032	32	1 1/4	42	78	140	42,4	18	4	18	100	1,75
2301312	I3WBD6B0-038	40	1 1/2	45	88	150	48,3	18	4	18	110	1,85
2301313	I3WBD6B0-050	50	2	45	102	165	60,3	18	4	18	125	2,55
2301314	I3WBD6B0-065	65	2 1/2	45	122	185	76,1	18	4	18	145	3,10
2301990	I3WBD6B0-080	80	3	50	138	200	88,9	20	8	18	160	4,00
2301315	I3WBD6B0-100	100	4	52	158	220	114,3	20	8	18	180	4,55
2305773	I3WBD6B0-125	125	5	55	188	250	139,7	22	8	18	210	6,20
2301361	I3WBD6B0-150	150	6	55	212	285	168,3	22	8	22	240	7,80

// SWIVEL FLANGE

// SWIVEL FLANGE EN 1092-1 TYPE 02 PN 10/16 - STEEL


-  Bride tournante PN 10/16 - acier
-  Losflansch PN 10/16 - stahl
-  Flangia girevole PN 10/16 - acciaio
-  Brida giratoria PN 10/16 - acero
-  Rörlig fläns PN 10/16 - stål
-  Svivelflens PN 10/16 - karbonstål
-  Svivel flange PN 10/16 - stål
-  Irtolaippa terästä laippa PN 10/16



Item Code	Part Number	DN	DN inch	D mm	Ales. mm	b mm	n° hole	O mm	c mm	Weight kg
2301368	I1WBD2A0-015	15	1/2	95	25	14	4	14	65	0,67
2301369	I1WBD2A0-020	20	3/4	105	31	16	4	14	75	0,95
2301370	I1WBD2A0-025	25	1	115	38	16	4	14	85	1,10
2301371	I1WBD2A0-032	32	1 1/4	140	47	18	4	18	100	1,62
2301372	I1WBD2A0-040	40	1 1/2	150	53	18	4	18	110	1,85
2301373	I1WBD2A0-050	50	2	165	65	19	4	18	125	2,45
2301374	I1WBD2A0-065	65	2 1/2	185	81	20	4	18	145	3,00
2301375	I1WBD2A0-080	80	3	200	94	20	8	18	160	3,95
2301376	I1WBD2A0-100	100	4	220	120	22	8	18	180	4,40
2301377	I1WBD2A0-125	125	5	250	145	22	8	18	210	5,90
2301378	I1WBD2A0-150	150	6	285	174	24	8	22	240	7,10

// SWIVEL FLANGE EN 1092-1 TYPE 02 PN 10/16 - STAINLESS STEEL 316L

-  Bride tournante PN 10/16 - acier inoxydable 316L
-  Losflansch PN 10/16 - edelstahl 1.4404 (AISI 316L)
-  Flangia girevole PN 10/16 - inox 316L
-  Brida giratoria PN 10/16 - inox 316L
-  Rörlig fläns PN 10/16 - syrafast stål 316L
-  Svivelflens PN 10/16 - syrefast stål 316L
-  Svivel flange PN 10/16 - rustfrit stål 316L
-  Irtolaippa PN 10/16 haponkestävä teräs 316L




Item Code	Part Number	DN	DN inch	D mm	Ales. mm	b mm	n° hole	O mm	c mm	Weight kg
2300116	I3WBD2A0-015	15	1/2	95	25	14	4	14	65	0,67
2300117	I3WBD2A0-020	20	3/4	105	31	16	4	14	75	0,95
2300118	I3WBD2A0-025	25	1	115	38	16	4	14	85	1,10
2300079	I3WBD2A0-032	32	1 1/4	140	47	18	4	18	100	1,62
2300080	I3WBD2A0-040	40	1 1/2	150	53	18	4	18	110	1,85
2300081	I3WBD2A0-050	50	2	165	65	19	4	18	125	2,45
2300082	I3WBD2A0-065	65	2 1/2	185	81	20	4	18	145	3,00
2300084	I3WBD2A0-080	80	3	200	94	20	8	18	160	3,95
2300085	I3WBD2A0-100	100	4	220	120	22	8	18	180	4,40
2301131	I3WBD2A0-125	125	5	250	145	22	8	18	210	5,90
2300104	I3WBD2A0-150	150	6	285	174	24	8	22	240	7,10

Dimensions shown may be changed without prior notice

// SWIVEL FLANGE ASME ANSI B 16.5 TYPE 15A LAP JOINT ASA 150 - STEEL


-  Bride tournante type 15A LJ ASA 150 - acier
-  Losflansch Typ 15A ASA 150 - stahl
-  Flangia girevole tipo 15A LJ ASA 150 - acciaio
-  Brida giratoria tipo 15A LJ ASA 150 - acero
-  Rörlig fläns typ 15A LJ ASA 150 - stål
-  Svivelflens type 15A LJ ASA 150 - karbonstål
-  Svivel flange type 15A LJ ASA 150 - stål
-  Irtolaippa tyyppi 15A ASA 150




Item Code	Part Number	DN inch	D mm	Ales. mm	b mm	n° hole	O mm	C mm	Weight kg
2302390	I1WBE9A0-015	1/2	89	22,9	11,2	4	15,8	60,3	0,50
2301911	I1WBE9A0-020	3/4	99	28,2	12,7	4	15,8	69,8	0,60
2302391	I1WBE9A0-025	1	108	35,0	14,3	4	15,8	79,4	0,80
2302392	I1WBE9A0-032	1 1/4	117	43,7	15,9	4	15,8	88,9	1,10
2302393	I1WBE9A0-040	1 1/2	127	50,0	17,5	4	15,8	98,4	1,40
2301912	I1WBE9A0-050	2	152	62,5	19,1	4	19,0	120,6	2,30
2302394	I1WBE9A0-065	2 1/2	178	75,4	22,3	4	19,0	139,7	3,20
2305709	I1WBE9A0-080	3	190	91,4	23,9	4	19,0	152,4	3,60
2305710	I1WBE9A0-102	4	229	116,4	23,9	8	19,0	190,5	5,80
2302062	I1WBE9A0-125	5	254	144,5	23,9	8	22,2	215,9	6,30
2302397	I1WBE9A0-152	6	279	171,4	25,4	8	22,2	241,3	8,60

// SWIVEL FLANGE ASME ANSI B 16.5 TYPE 15A LAP JOINT ASA 150 - STAINLESS STEEL 316L

-  Bride tournante type 15A LJ ASA 150 - acier inoxydable 316L
-  Losflansch Typ 15A ASA 150 - edelstahl 1.4404 (AISI 316L)
-  Flangia girevole tipo 15A LJ ASA 150 - inox 316L
-  Brida giratoria tipo 15A LJ ASA 150 - inox 316L
-  Rörlig fläns typ 15A LJ ASA 150 - syrafast stål 316L
-  Svivelflens type 15A LJ ASA 150 - syrefast stål 316L
-  Svivel flange type 15A LJ ASA 150 - rustfrit stål 316L
-  Irtolaippa tyyppi 15A ASA 150 lbs haponkestävä teräs 316L



Item Code	Part Number	DN inch	D mm	Ales. mm	b mm	n° hole	O mm	C mm	Weight kg
2302665	I3WBE9A0-015	1/2	89	22,9	11,2	4	15,8	60,3	0,50
2302666	I3WBE9A0-020	3/4	99	28,2	12,7	4	15,8	69,8	0,60
2302667	I3WBE9A0-025	1	108	35,0	14,3	4	15,8	79,4	0,80
2301992	I3WBE9A0-032	1 1/4	117	43,7	15,9	4	15,8	88,9	1,10
2302668	I3WBE9A0-040	1 1/2	127	50,0	17,5	4	15,8	98,4	1,40
2301994	I3WBE9A0-050	2	152	62,5	19,1	4	19,0	120,6	2,30
2302669	I3WBE9A0-065	2 1/2	178	75,4	22,3	4	19,0	139,7	3,20
2302670	I3WBE9A0-080	3	190	91,4	23,9	4	19,0	152,4	3,60
2301996	I3WBE9A0-100	4	229	116,4	23,9	8	19,0	190,5	5,80
2301748	I3WBE9A0-150	6	279	171,4	25,4	8	22,2	241,3	8,60

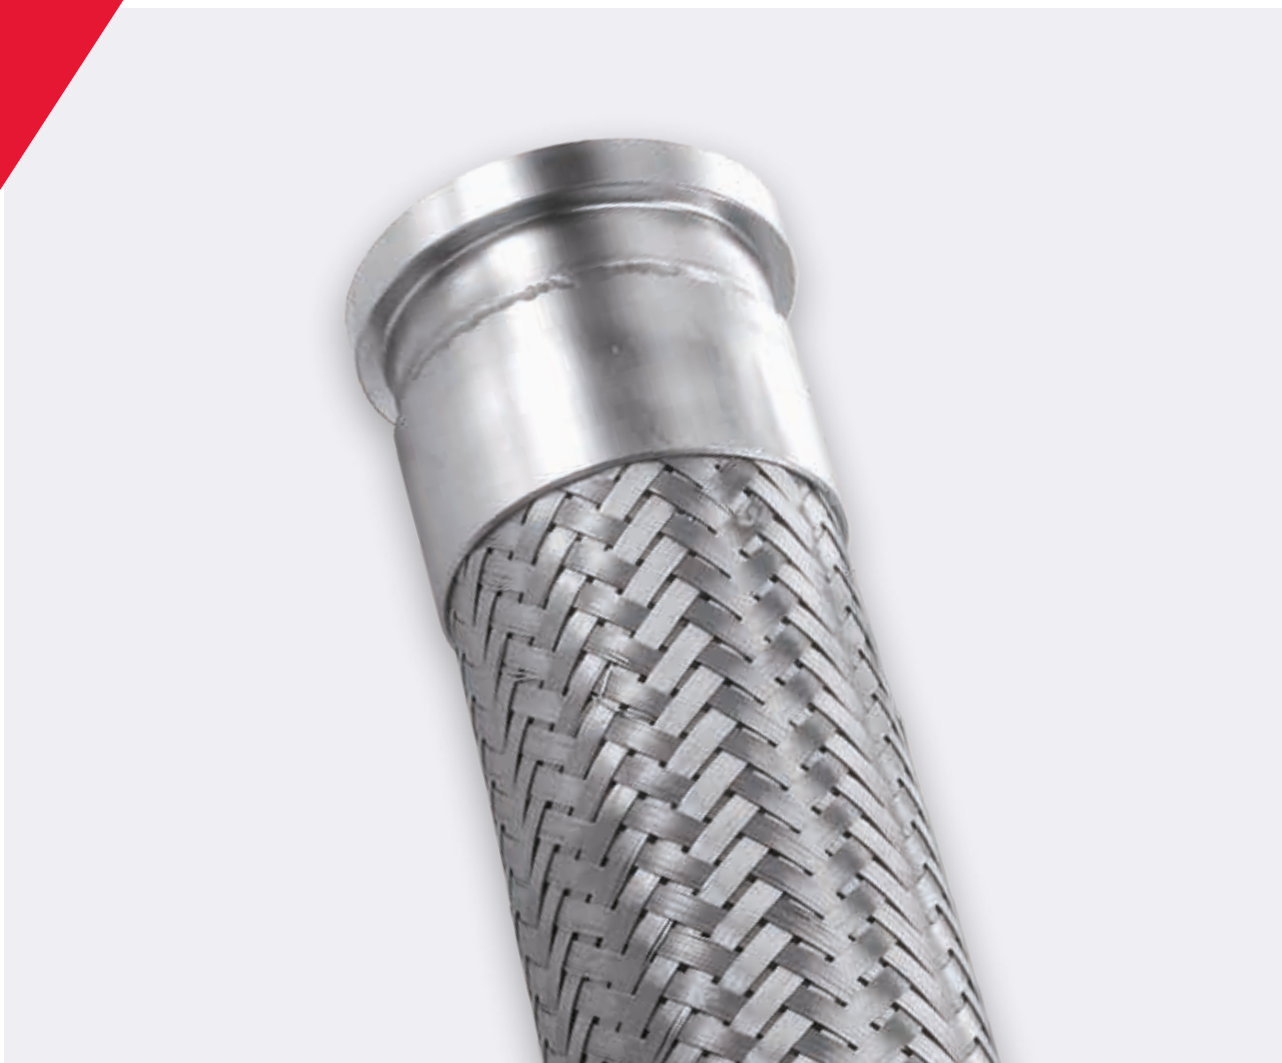

// COLLARS

 COLLETS

 KRAGEN

 COLLETTI

 COLLARES

 FLÄNS KRAGE

 SVEISEKRAVE


 KRAVER

 KAULUS

// COLLARS

// FLANGE LIGHT SUPPORT FLARED COLLAR ISO PN 10/16 - STAINLESS STEEL 316L

-  Collet mince embouti ISO PN 10/16 à souder - acier inoxydable 316L
-  Leichter bördelring ISO PN 10/16 - edelstahl 1.4404 (AISI 316L)
-  Colletto imbutito ISO PN 10/16 a saldare - inox 316L
-  Cuello embutido ISO PN 10/16 para soldar - inox 316L
-  Flänskrage lätt utförande stöder ISO PN 10/16 - syrefast stål 316L
-  Sveisekrave ISO PN 10/16 - syrefast stål 316L
-  Glat flange let udførelse ISO PN 10/16 - rustfrit stål 316L
-  Irtolaipan kaulus PN 10/16 haponkestävää terästä 316L



Item Code	Part Number	DN	DN inch	D mm	S mm	e mm	G mm	H mm	Weight kg
2300413	I3BBC440-015	15	1/2	21,3	1,6	2	45	6	0,01
2300414	I3BBC440-020	20	3/4	26,9	1,6	2	58	7	0,04
2300415	I3BBC440-025	25	1	33,7	1,6	2	68	9	0,05
2300416	I3BBC440-032	32	1 1/4	42,4	1,6	2	78	10	0,07
2300417	I3BBC440-040	40	1 1/2	48,3	1,6	2	88	10	0,08
2300418	I3BBC440-050	50	2	60,3	1,6	2	102	12	0,11
2300419	I3BBC440-065	65	2 1/2	76,1	1,6	2	122	12	0,15
2300420	I3BBC440-080	80	3	88,9	2,0	2	138	13	0,19
2300421	I3BBC440-100	100	4	114,3	2,0	2	158	13	0,21
2301130	I3BBC440-125	125	5	139,7	2,0	2	188	14	0,26
2301148	I3BBC440-150	150	6	168,3	2,0	2	212	18	0,34

// FLANGE LIGHT SUPPORT MACHINED COLLAR ISO TYPE 35 PN 10/16 STAINLESS STEEL 316L


-  Collet épais type 35 ISO PN 10/16 à souder - acier inoxydable 316L
-  Schwerer bördelring Typ 35 ISO PN 10/16 - edelstahl 1.4404 (AISI 316L)
-  Colletto tipo 35 ISO PN 10/16 a saldare - inox 316L
-  Cuello tipo 35 ISO PN 10/16 para soldar - inox 316L
-  Fläns kraftigt utförande stöder typ 35 ISO PN 10/16 - syrefast stål 316L
-  Sveisekrave kraftig - type 35 ISO PN 10/16 - syrefast stål 316L
-  Flange svær udførelse type 35 ISO PN 10/16 - rustfrit stål 316L
-  Irtolaipan kaulus 35 ISO PN 10/16 haponkestävää terästä 316L



Item Code	Part Number	DN	DN inch
2300424	I3BBD440-025	25	1
2300425	I3BBD440-032	32	1 1/4
2300426	I3BBD440-040	40	1 1/2
2300427	I3BBD440-050	50	2
2300428	I3BBD440-065	65	2 1/2
2300429	I3BBD440-080	80	3
2300430	I3BBD440-100	100	4
2301260	I3BBD440-125	125	5
2301261	I3BBD440-150	150	6

// ANSI SCH.10S - STUB END TYPE C - STAINLESS STEEL 316L

-  Collet stub end type C - ANSI SCH.10S - acier inoxydable 316L
-  Bördel mit schweisssutzen typ C - edelstahl 1.4404 (AISI 316L)
-  Colletto stub end tipo C - ANSI SCH.10S - inox 316L
-  Cuello stub end tipo C - ANSI SCH.10S - inox 316L
-  Kort anslutning typ C - ANSI SCH.10S - syrafast stål 316L
-  Krave ende type C - ANSI SCH.10S - syrefast stål 316L
-  Slangestuds type C - ANSI SCH.10S - rustfrit stål 316L
-  Ansi laippa tyyppi C haponkestävä teräs 316L



Item Code	Part Number	DN inch
2302657	I3BBE420-015	1/2
2301229	I3BBE420-020	3/4
2301147	I3BBE420-025	1
2301226	I3BBE420-032	1 1/4
2301227	I3BBE420-040	1 1/2
2300973	I3BBE420-050	2
2301228	I3BBE420-065	2 1/2
2300974	I3BBE420-080	3
2301197	I3BBE420-100	4
2302061	I3BBE420-125	5
2302658	I3BBE420-150	6



// FITTINGS

 RACCORDS

 ARMATUREN

 RACCORDI

 RACORES

 KOPPLING

 KUPLINGER


 KOBLINGER

 LIITTIMET

// FITTINGS

// MALE BSPT HEXAGONAL - STEEL


-  Måle gaz hexagonal - acier
-  Aussengewinde mit sechskant BSPT - stahl
-  Maschio BSPT esagonale - acciaio
-  Macho BSPT hexagonal - acero
-  Utvändig rörgänga med sexkant - stål
-  Male BSPT med sekskant - karbonstål
-  Hanpart BSPT heksagonal - stål
-  Ulkokierreltiin BSP kierre avainväliillä teräs



Item Code	Part Number	DN	DN inch	G inch	L mm	Ø mm	H mm	Weight kg
2302242	I0B07100-006013	6	1/4	1/4	20,0	13,5	14	0,010
2301896	I0B07100-010017	10	3/8	3/8	22,5	17,2	19	0,020
2301897	I0B07100-013021	13	1/2	1/2	25,0	21,3	23	0,035
2301898	I0B07100-019027	19	3/4	3/4	31,5	26,9	27	0,060
2301899	I0B07100-025034	25	1	1	36,0	33,7	36	0,110
2301900	I0B07100-032042	32	1 1/4	1 1/4	38,0	42,4	46	0,175
2301901	I0B07100-038049	38	1 1/2	1 1/2	39,0	48,3	50	0,180
2301902	I0B07100-051060	51	2	2	43,0	60,3	65	0,340

// MALE BSPT HEXAGONAL - STAINLESS STEEL 316L

-  Måle gaz hexagonal - acier inoxydable 316L
-  Aussengewinde mit sechskant BSPT - edelstahl 1.4404 (AISI 316L)
-  Maschio BSPT esagonale - inox 316L
-  Macho BSPT hexagonal - inox 316L
-  Utvändig rörgänga med sexkant - syrafast stål 316L
-  Male BSPT med sekskant - syrefast stål 316L
-  Hanpart BSPT heksagonal - rustfrit stål 316L
-  Ulkokierreltiin BSPT kierre avainväliillä haponteräs 316L




Item Code	Part Number	DN	DN inch	G inch	L mm	Ø mm	H mm	Weight kg
2301959	I3B0710Z-006013	6	1/4	1/4	20,0	13,5	14	0,010
2300431	I3B0710Z-010017	10	3/8	3/8	22,5	17,2	19	0,020
2300432	I3B0710Z-013021	13	1/2	1/2	25,0	21,3	23	0,035
2300433	I3B0710Z-019027	19	3/4	3/4	31,5	26,9	27	0,060
2300434	I3B0710Z-025034	25	1	1	36,0	33,7	36	0,110
2300435	I3B0710Z-032042	32	1 1/4	1 1/4	38,0	42,4	46	0,175
2300436	I3B0710Z-038049	38	1 1/2	1 1/2	39,0	48,3	50	0,180
2301966	I3B0710Z-051060	51	2	2	43,0	60,3	65	0,340

Dimensions shown may be changed without prior notice

// MALE BSTP PIPE - STAINLESS STEEL 316L

-  Mâle gaz bobine - acier inoxydable 316L
-  Aussengewinde BSPT - edelstahl 1.4404 (AISI 316L)
-  Maschio BSPT bobina - inox 316L
-  Macho BSPT cilíndrico - inox 316L
-  Utvändig rörgånga - syrefast stål 316L
-  Male BSPT glatt - syrefast stål 316L
-  Hanpart BSPT rør - rustfrit stål 316L
-  Ulkokierrelliitin BSP kierre avainvälillä haponkestävä teräs 316L



Item Code	Part Number	DN	DN inch	G inch	L mm	Weight kg
2305097	I3B07100-006013	6	1/4	1/4	22	0,010
2300438	I3B07100-010017	10	3/8	3/8	23	0,015
2300439	I3B07100-013021	13	1/2	1/2	27	0,025
2300440	I3B07100-019027	19	3/4	3/4	33	0,040
2300441	I3B07100-025034	25	1	1	35	0,065
2300442	I3B07100-032042	32	1 1/4	1 1/4	36	0,085
2300443	I3B07100-038049	38	1 1/2	1 1/2	41	0,110
2301940	I3B07100-051060	51	2	2	46	0,195
2300445	I3B07100-063076	63	2 1/2	2 1/2	55	0,280
2301941	I3B07100-076090	76	3	3	60	0,560
2301942	I3B07100-102114	102	4	4	80	1,065

// STANDPIPE FOR WELDING FLANGE - STAINLESS STEEL 316L


-  Tube lisse à souder bride - acier inoxydable 316L
-  Rohrstützen für anschweißflansch - edelstahl 1.4404 (AISI 316L)
-  Tubo liscio per saldare le flange - inox 316L
-  Tubo para soldar bridas - inox 316L
-  Rörstuds för svetsfläns - syrefast stål 316L
-  Rørstuss for sveis - syrefast stål 316L
-  Svejserørstuds - rustfrit stål 316L
-  Putkipäät hitsattavalle laipalle- haponkestävä



Item Code	Part Number	DN	D inch	L mm
2302650	I3B22100-006010	6	1/4	40
2301974	I3B22100-010017	10	3/8	50
2301975	I3B22100-013021	13	1/2	50
2301976	I3B22100-019027	19	3/4	50
2301977	I3B22100-025034	25	1	50
2301978	I3B22100-032042	32	1 1/4	50
2301980	I3B22100-038049	38	1 1/2	60
2301981	I3B22100-050060	51	2	60
2302651	I3B22100-063076	63	2 1/2	60
2301984	I3B22100-076090	76	3	65
2301987	I3B22100-102114	102	4	75

// SWIVEL FEMALE BSP - STEEL


-  Femelle tournante BSP - acier
-  Überwurfmutter BSP - stahl
-  Femmina girevole BSP - acciaio
-  Hembra giratoria BSP - acero
-  Invändigt rörlig rörgånga - stål
-  Female BSP svivel - karbonstål
-  Hunpart svivel BSP - stål
-  Pyörivä sisäkierreltiin teräs



Item Code	Part Number	DN	D inch
2301904	I0B05200-010017	10	3/8
2301905	I0B05200-013021	13	1/2
2301906	I0B05200-019027	19	3/4
2301907	I0B05200-025034	25	1
2301908	I0B05200-032042	32	1 1/4
2301909	I0B05200-038049	38	1 1/2
2301910	I0B05200-051060	51	2

// SWIVEL FEMALE BSP - STAINLESS STEEL 316L

-  Femelle tournante BSP - acier inoxydable 316L
-  Überwurfmutter BSP - edelstahl 1.4404 (AISI 316L)
-  Femmina girevole BSP - inox 316L
-  Hembra giratoria BSP - inox 316L
-  Invändigt rörlig rörgånga - syrefast stål 316L
-  Female BSP svivel - syrefast stål 316L
-  Hunpart svivel BSP - rustfrit stål 316L
-  Pyörivä sisäkierreltiin haponkestävä teräs 316L




Item Code	Part Number	DN	D inch
2301932	I3B05200-006013	6	1/4
2301933	I3B05200-010017	10	3/8
2301934	I3B05200-013021	13	1/2
2301935	I3B05200-019027	19	3/4
2301936	I3B05200-025034	25	1
2301937	I3B05200-032042	32	1 1/4
2301938	I3B05200-038049	38	1 1/2
2301939	I3B05200-051060	51	2

Dimensions shown may be changed without prior notice

// UNION 3P COUPLING - BUTT WELD END / FEMALE BSP - STAINLESS STEEL 316L


-  Raccord union 3P lisse - femelle BSP - acier inoxydable 316L
-  Verschraubung konisch dichtend mit innengewinde BSPT - edelstahl 1.4404 (AISI 316L)
-  Raccordo unione 3P a saldare - femmina BSP - inox 316L
-  Conector 3P liso - hembra BSP - inox 316L
-  Unionskoppling plan -svetsanslutning - invändig BSP - syrafast stål 316L
-  Union - sveisestuss - BSP female syrefast 316L
-  Union 3P kobling - glat svejs - hunpart BSP - rustfrit stål 316L
-  Hitsattava lähtöliitin BSP sisäkierre haponkestävä 316L



Item Code	Part Number	DN	DN inch	G inch	Ø mm	L mm	R mm	S mm	Weight kg
2300027	I3TQ1307-013017	10	3/8	3/8	17,2	35	21	24	0,060
2302006	I3TQ1307-013021	13	1/2	1/2	21,3	40	27	30	0,105
2300028	I3TQ1307-019027	19	3/4	3/4	26,9	45	36	36	0,170
2300029	I3TQ1307-025034	25	1	1	33,7	50	37	46	0,285
2300030	I3TQ1307-032042	32	1 1/4	1 1/4	42,4	53	46	55	0,375
2300031	I3TQ1307-038049	38	1 1/2	1 1/2	48,3	53	52	60	0,425
2302008	I3TQ1307-051060	51	2	2	60,3	61	63	70	0,585
2302163	I3TQ1307-063076	63	2 1/2	2 1/2	76,1	71	80	92	1,020

// UNION 3P COUPLING - BUTT WELD END / MALE BSP - STAINLESS STEEL 316L

-  Raccord union 3p lisse - mâle BSPT - acier inoxydable 316L
-  Verschraubung konisch dichtend mit aussengewinde BSPT - edelstahl 1.4404 (AISI 316L)
-  Raccordo unione 3p a saldare - maschio BSPT - inox 316L
-  Conector 3p liso - macho BSPT - inox 316L
-  Unionskoppling plan - svetsanslutning - utvändig BSPT - syrafast stål 316L
-  Union - sveisestuss - BSPT male syrefast 316L
-  Union 3p kobling - glat svejs - hanpart BSPT - rustfrit stål 316L
-  Hitsattava lähtöliitin BSP ulkokierre haponkestävä 316L



Item Code	Part Number	DN	DN inch	D inch
2300021	I3TQ1207-013017	10	3/8	3/8
2302012	I3TQ1207-013021	13	1/2	1/2
2300022	I3TQ1207-019027	19	3/4	3/4
2300023	I3TQ1207-025034	25	1	1
2300024	I3TQ1207-032042	32	1 1/4	1 1/4
2300025	I3TQ1207-038049	38	1 1/2	1 1/2
2302013	I3TQ1207-051060	51	2	2